


Commercial grade flexible polyolefin halogen free tubing for a wide range of applications, especially where good abrasion resistance or chemical resistance is required.

Characteristics

- Operating Temperature: -55°C ~ 105°C
- Min. Shrink Temperature: 115°C
Shrinking start at 75°C
- Shrink Ratio: 2:1
- Dielectric Strength: 45 kV/mm
- Standard Colour(s): Black, Transparent

SINGLE WALL POLYOLEFIN

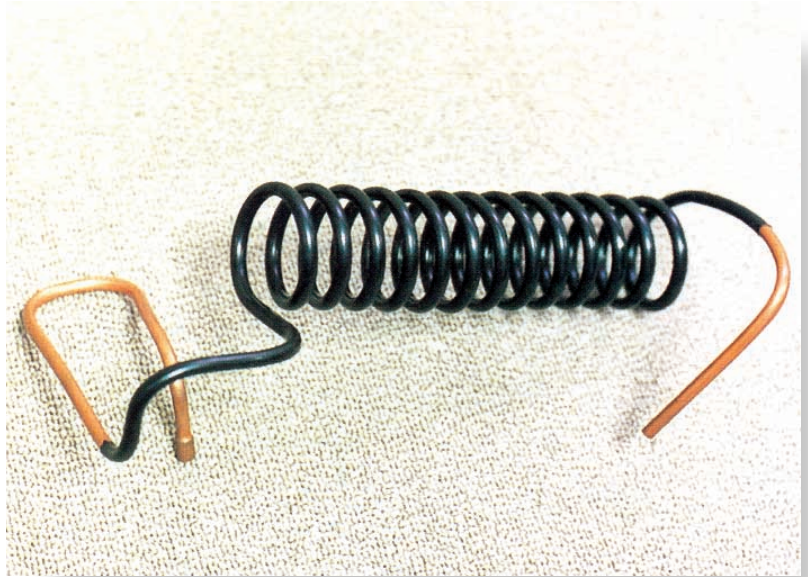

Application Fields

General insulation of wire terminations and fasten connectors. Mechanical and abrasion protection of pipes and other components.

Remarks

Non-standard colours are available upon request.

Table of Standard Sizes and Packaging

A Type/Size (Inch)	Inside Diameter (mm)		Wall Thickness (mm) Recovered (nom.)	Quantity per Spool / Box (m)
	Expanded (min.)	Recovered (max.)		
3/64	1.20	0.60	0.40	300/900
1/16	1.60	0.80	0.43	300/900
3/32	2.40	1.20	0.51	150/900
1/8	3.20	1.60	0.51	150/900
3/16	4.80	2.40	0.51	60/600
1/4	6.4	3.20	0.64	60/300
3/8	9.5	4.80	0.64	60/300
1/2	12.7	6.4	0.64	60/300
3/4	19.1	9.5	0.76	60/180
1	25.4	12.7	0.89	60/180
1-1/2	38.1	19.1	1.02	60/180
2	50.8	25.4	1.14	60/120
3	76.2	38.1	1.07	60/60