


Commercial grade flame retardant flexible polyolefin tubing. Versatile, approved for many industrial applications.

Characteristics

- Operating Temperature: -55°C ~ 125°C
- Min. Shrink Temperature: 90°C
Shrinking start at 60°C
- Shrink Ratio: 2:1
- Dielectric Strength: 28kV/mm
- Standard Colour(s): Black, Red, Yellow, Green, Blue, White

SINGLE WALL

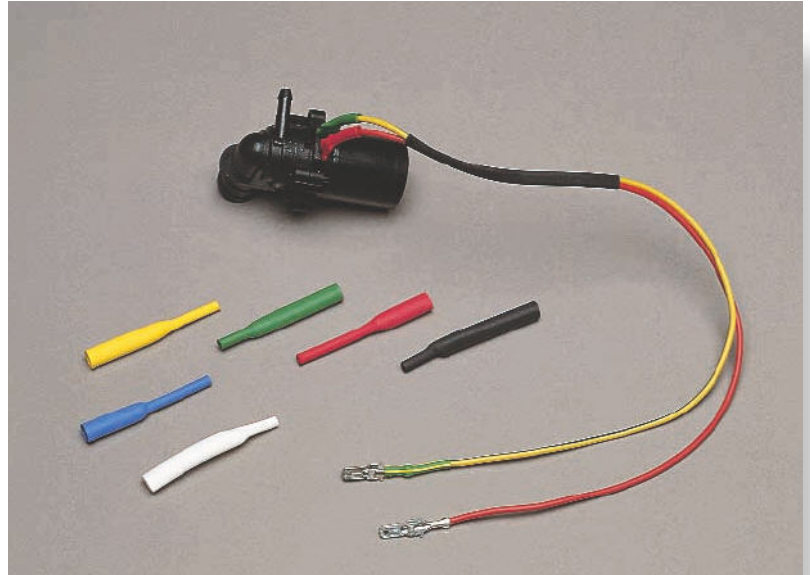

Application Fields

General insulation, cable bundling, mechanical protection in electric and automotive industries. Colour coding of cable harnesses.

Remarks

Other colours and 1.2m cut length are available upon request.

Table of Standard Sizes and Packaging

B11 Type/Size (Inch)	Inside Diameter (mm)		Wall Thickness (mm) Recovered (nom.)	Quantity per Spool / Box
	Expanded (min.)	Recovered (max.)		
3/64	1.20	0.60	0.41	300/900
1/16	1.60	0.80	0.43	300/900
3/32	2.40	1.20	0.51	150/900
1/8	3.20	1.60	0.51	150/900 ¹
3/16	4.80	2.40	0.51	60/600 ²
1/4	6.4	3.20	0.64	60/300 ³
3/8	9.5	4.80	0.64	60/300
1/2	12.7	6.4	0.64	60/300
3/4	19.1	9.5	0.76	60/180
1	25.4	12.7	0.89	60/180
1-1/4	31.8	15.9	1.02	60/180
1-1/2	38.1	19.1	1.02	60/180
2	50.8	25.4	1.14	60/120
3	76.2	38.1	1.27	60/60
4	101.6	50.8	1.40	30/30

Packaging of black colour: 1
= 300/900 2
= 150/600 3
= 100/300