


Halogen free Flame retardant Silicone rubber tubing. High temperature rated to protect from water and weather. Remains flexible at low temperatures. Very good electrical and mechanical properties.

Characteristics

- Operating Temperature:
-50°C ~ 200°C
- Min. Shrink Temperature: 140°C
Shrinking start at 60°C
- Shrink Ratio: 2:1
- Dielectric Strength: 20 kV/mm
- Standard Colour(s): Grey

SILICON RUBBER

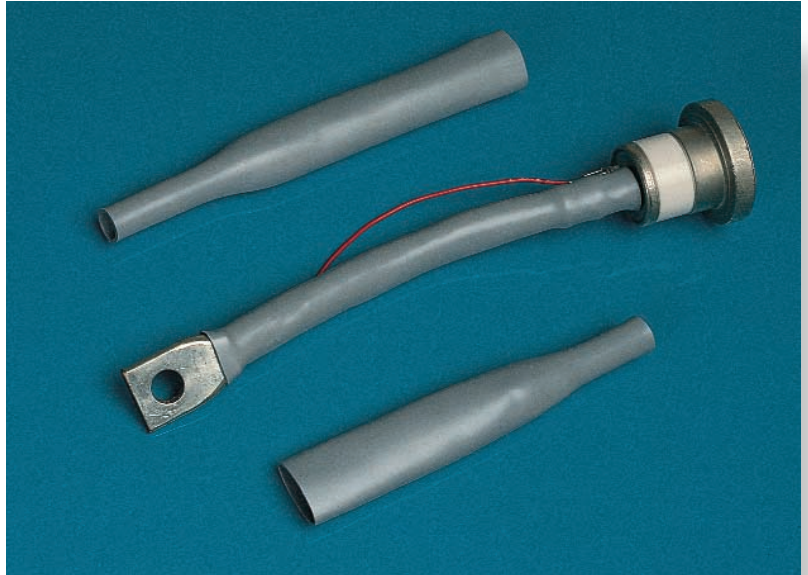

Application Fields

For all kind of electrical insulation in high temperature environments such as heater coils, thermistors, AC and DC generator cables, lightning and engine harnesses.

Remarks

Other sizes are available upon request.

Table of Standard Sizes and Packaging

SR Type/Size (mm)	Inside Diameter (mm)		Wall Thickness (mm)	Quantity per Bag / Box (m)
	Expanded (min.)	Recovered (max.)	Recovered (nom.)	
2.9	2.90	1.60	1.0	100/100
4.9	4.90	2.60	1.0	100/100
5.8	5.80	3.40	1.0	100/100
7.8	7.8	4.20	1.0	100/100
11.0	11.0	5.80	1.5	50/100
15.5	15.5	8.5	1.5	50/50
21.0	21.0	11.5	2.0	25/25
23.0	23.0	16.0	2.0	20/20
31.5	31.5	18.0	2.0	20/20
43.0	43.0	24.0	3.0	20/20
55.0	55.0	30.0	3.0	10/10
66.0	66.0	37.0	3.0	10/10
70.0	70.0	44.0	3.0	5/5

